


Installation Guide

Case components

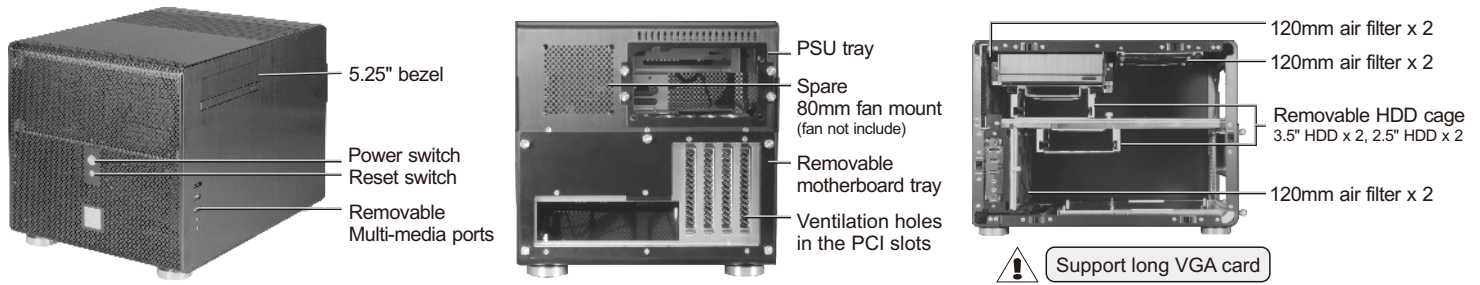


Hardware list

* Extra quantities are spare parts.

	Buzzer (1)		Anti-vibration rubber-rings (12) for 3.5" HDDs and CD-ROM		Thumb screw (8) for 3.5" HDD mounting		Screw M3*9.5 screws (12) for 2.5" HDD and CD-ROM
	USB 3.0 to USB 2.0 converter (1)		Anti-vibration rubber-rings (8) for 2.5" HDDs		Thumb screw (2) for HDD mounting		Screw (9) for motherboard & spare parts
	Cable tie (2)		Screw (4) for power supply mounting				

Removable side panel

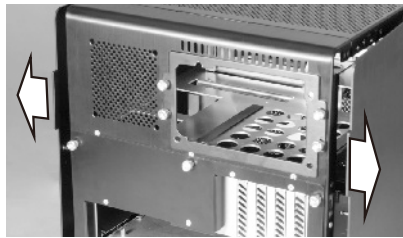

Pull side panel out to remove.


Motherboard installation



Remove five screws to release the M/B tray




Slide out M/B tray





Place the M/B on the copper bolt and secure with screws.


3.5" / 2.5" HDD installation

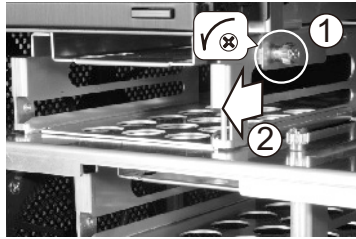


Remove thumb screw, and slide to release the HDD cage.

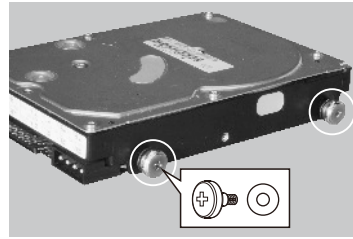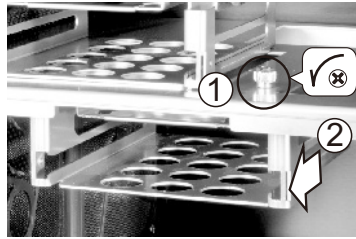


Install the screws to the 3.5" HDD with anti-vibration rubber rings.

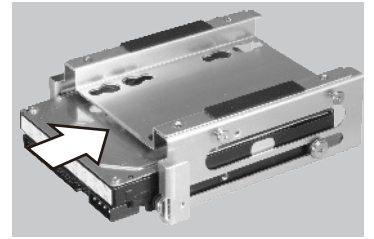

Slide the HDD into the HDD cage.

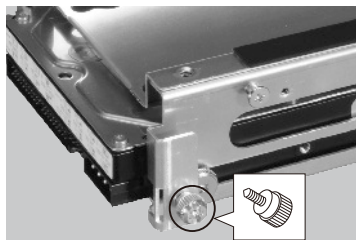

Use thumb screw to secure it.

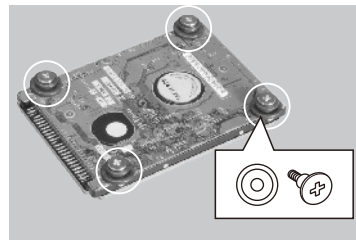


Install the screws to the 2.5" HDD with anti-vibration rubber rings.




Slide the HDD into the hole on the HDD platform.


Power Supply installation

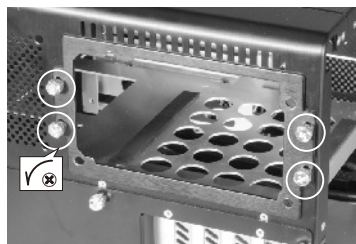


Loosen the four thumb screws and remove the PSU tray.

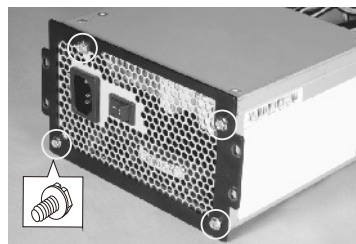

Install the power supply onto the PSU tray.

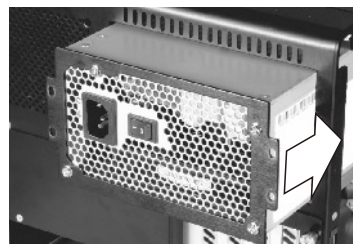


Gently slide into place.

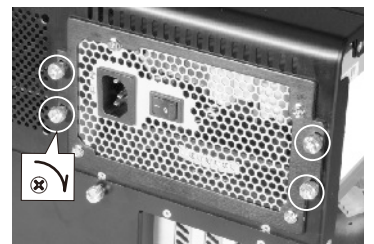


Fasten four thumb screws to secure the PSU.

Notice:

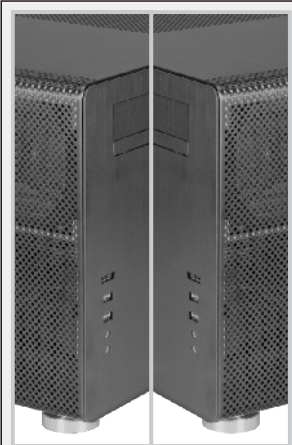


! ODD & multi-media port can be placed in right or left side.


ODD installation




Remove two screws to release the 5.25 inch bezel.




Install the screws into the ODD with anti-vibration rubber rings.




Push the ODD into the 5.25 inch rack.




Install 5.25 inch bezel, fasten two screws to finish it.




Press the right and left side of the bezel to remove.



Install the screws into the ODD with anti-vibration rubber rings.




Push the ODD into the 5.25 inch rack.




Install 5.25 inch bezel, fasten two screws to finish it.


Multi-media port change to left side guide




Remove two screws.




Release multi-media port.




Remove two screws.



Release bracket.




Placed multi-media port.




Fasten two screws.


Remove air filter




Remove thumb screw, slide to release the air filter.



Remove thumb screw, slide to release the air filter.



Remove thumb screw, slide to release the air filter.






Remove thumb screw, slide to release the air filter.




Remove four screws to release the top air filter.

I/O port installation

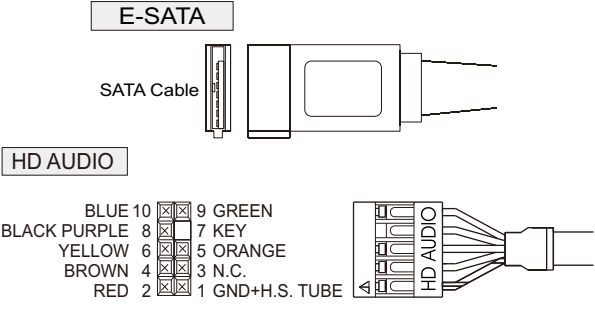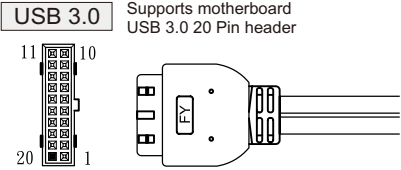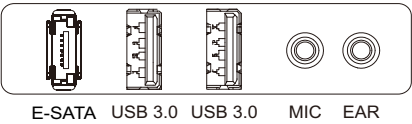

Cable installation guide

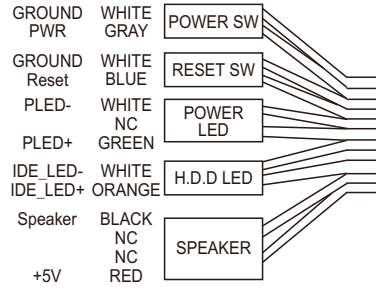

USB 3.0 to USB 2.0 converter

